




Mobile signalling cart

- Hot galvanized frame
- Upper and lower part can be separated
- Battery fixing support
- Handle-shaft and brake
- Safe stand due to low centre of gravity
- With/without flag signaller
- Board 1700 x 500mm, reflective sheeting type 1, Engineer Grade
- Left pointing / right pointing changeable manually
- Solid rubber tyres 200 x 50mm

Ref.-no.	Packing Unit
25007H with MS 340 halogen 12v	1
25007E with MS 340 xenon 12v	1
25007HW with MS 340 halogen 12v with waving flag signaller	1
25007EW with MS 340 xenon 12v with waving flag signaller	1

UVW:	37 kg
Overall length:	1.600 mm
Overall width:	730 mm
Overall height	
raised:	2.530 mm
lowered:	1.600 mm
Battery holder(WxLxH):	225x500x230mm

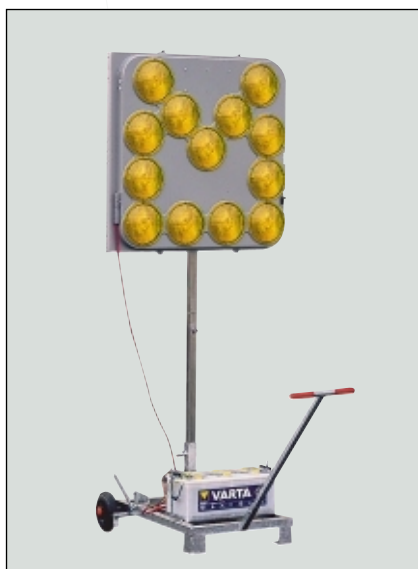

Mobile Halogen Light Arrow cart, medium

- Hot galvanized frame
- Upper and lower part can be separated
- Battery fixing support
- Handle-shaft and brake
- Safe stand due to low centre of gravity
- Light arrow HLPK 13, with 13 halogen lamps, 20w each
- Left pointing / right pointing changeable by electric rotary switch
- Solid rubber tyres 200 x 50mm

Ref.-no.	Packing Unit
25007LP13 Mobile Halogen Flashing Arrow with HLPK 13 (21023), 12/24Vd.c. with 13 halogen high intensity lights electrically switched	1

UVW:	45 kg
Overall length:	1.600 mm
Overall width:	960 mm
Overall height	
raised:	2.360 mm
lowered:	1.540 mm
Battery holder(WxLxH):	225x500x230mm



Mobile Halogen Flashing Arrow, small

- Metal parts hot galvanized
- Light arrow frame made of stainless steel
- Upper and lower part can be separated
- Closed battery box with internal fixing support
- Handle-shaft
- Safe stand due to low centre of gravity
- Light arrow HLP 8, with 8 halogen lamps, 20w each
- Left pointing / right pointing changeable manually
- Solid rubber tyres 200 x 50mm

Ref.-no.	Packing Unit
25156LP8 Mobile Halogen Flashing Arrow with halogen flashing arrow HLP 8, 12/24V d.c. with 8 high intensity halogen lights RS 2000, incl. manual turning device	1

UVW:	45kg
Overall length:	1.500mm
Overall width:	550mm
Overall height:	2.100mm

Subject to technical alterations

* BAST = Federal Highway Research Institute | ** TL-Warnleuchten = Technical Terms for Production and Delivery of Markers and Lamps | *** TL-Warnleuchten = Technical Terms for Production and Delivery of Markers

Advance directional trailer



VWTFPrisma Advance directional trailer

Applications:

- On all kinds of roads, especially on motorways and other dual carriage ways in combination with lane closure trailers

Frame:

- Hot galvanized
- Partly bolt jointed for easy exchange and maintenance

Axle:

- Maintenance free, hot galvanized rubber suspension axle

Brake:

- Parking brake

Towing System:

- Type AL-KO, hot galvanized.
- Bolt jointed to chassis and axle
- Adjustable in height
- Optional ball hitch or eye hitch (DIN)

Chassis:

- Steel profiles welded
- Hot galvanized
- Additional bars and supports ensure a torsion-free and stable body

Cargo bed, model 25932H

- Bottom and side walls are made of 15mm extra strong lined plywood, waterproof.

Loading Rails, model 25933H

- Movable aluminium rails
- When pulled out small carts can be rolled on
- Hot galvanized fastening supports

Battery Box:

- Robust, impact resistant plastic, lockable
- Battery fixing supports inside

Warning System:


- Board hinged
- Hot galvanized frame made of squared steel pipe
- Lifting support through 2 big gas struts
- Safety locking brackets and pins
- Three or four single bodies (aluminium) in prism shape which can be turned individually in order to form a sign-board which enables to show at least 5 different directional signs
- Three speed limit signs (hinged) on the top
- Two halogen high intensity lights MS 340.

Ref.-no. Packing Unit

25930H with MS 340 halogen double system	1
25932H with MS 340 halogen double system and cargo bed	1
25933H with MS 340 halogen double system with loading rails for mobile warning carts	1

GVWR:	750kg
UVW:	330kg
Tires:	175 /65 R14 or 175 / R 14 or 175 /70 R14
Coupling height:	340 to 1,050mm
Overall length:	3,900mm
Overall width:	1,680mm
Overall height	
Raised.:	3,750mm
Lowered:	1,760mm
Battery box (WxLxH):	90x350x360mm
Warning board raised (WxH):	1,480 x 2,550mm
Road signs:	VZ 274 / 58+60 80km / 100km, Ø 750mm, collapsible
Direction board (WxH):	1,250 x 1,600mm sheeting Type I, Engineer Grade
Operation voltage	
Warning light system:	12v
Vehicle's tail lights:	12v or 24v
Current input:	6,1A

Additional to ref.-no. 25932H:	
UVW:	360kg
Payload:	390kg
Cargo bed (WxL):	1,180 x 1,670mm
Additional to ref.-no. 25933H:	
UVW:	350kg
Payload:	400kg

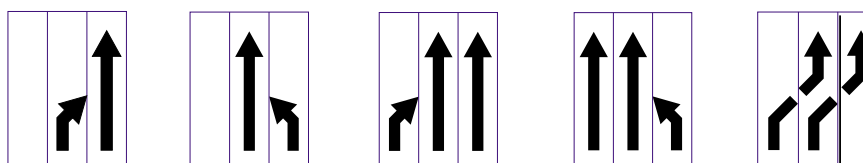

Subject to technical alterations

* BAST = Federal Highway Research Institute | ** TL-Warnleuchten = Technical Terms for Production and Delivery of Markers and Lamps | *** TL-Warnleuchten = Technical Terms for Production and Delivery of Markers

Mobile Lane Closure Trailers



FA 2

Ref.-no. Packing Unit

- 25900H** 1
incl. MS 340 halogen triple system
- 25900E** 1
incl. MS 340 xenon flash triple system
- 25900ELP13** 1
incl. MS 340 xenon flash double system and halogen flashing arrow HLPK 13
- 25900ERS13** 1
incl. MS 340 xenon flash double system and 13 RS 2000 halogen lamps 12v/20w
- 25900ERS15** 1
incl. MS 340 xenon flash double system and 15 RS 2000 halogen lamps 12v/20w



GVWR:	450 kg
UVW:	310 kg
Overall length:	3,480mm
Overall width:	1,730mm
Overall height:	
raised:	2,900mm
lowered:	1,930mm



**FA 2 KL
(small cargo bed)**

Ref.-no. Packing Unit

- 25903H** 1
with MS 340 halogen triple system
- 25903E** 1
with MS 340 xenon flash triple system
- 25903ELP13** 1
with MS 340 xenon flash double system and halogen flashing arrow HLPK 13
- 25903ERS13** 1
with MS 340 xenon flash double system and 13 RS 2000 halogen lamps 12v/20w
- 25903ERS15** 1
with MS 340 xenon flash double system and 15 RS 2000 halogen lamps 12v/20w



GVWR:	750kg
UVW:	350kg
Overall length:	3,480mm
Overall width:	1,730mm
Overall height:	
raised	2,900mm
lowered	1,930mm
Payload:	400kg
Cargo bed (BxL):	1,150 x 1,350mm

Subject to technical alterations

* BAST = Federal Highway Research Institute | ** TL-Warnleuchten = Technical Terms for Production and Delivery of Markers and Lamps | *** TL-Warnleuchten = Technical Terms for Production and Delivery of Markers

Mobile Lane Closure Trailers



AT 93

Ref.-no. Packing Unit

25910LPDP 1
incl. halogen flashing arrow board, with remote hand set and turning device for mechanical arrow

GVWR:	750kg
UVW:	550kg
Overall length:	3,470mm
Overall width:	2,350mm
Overall height	
raised	3,960mm
lowered	2,640mm



**AT 93 KL
(small cargo bed)**

Ref.-no. Packing Unit

25921LPDP 1
incl. halogen flashing arrow board
incl. remote hand set and turning device for mechanical arrow GVWR: 750kg

25922LPDP 1
incl. halogen flashing arrow board
incl. remote hand set and turning device for mechanical arrow. GVWR: 1,000 kg



**AT 93 GL
(large cargo bed)**

Ref.-no. Packing Unit

25911LPDP 1
incl. halogen flashing arrow board, with remote remote hand set and turning device for mechanical arrow

GVWR:	1,300kg
UVW:	700kg
Payload:	600kg
Overall length:	4,880mm
Overall width:	2,370mm
Overall height	
raised	3,970mm
lowered	2,620mm
Cargo bed (WxL):	1,870 x 2,470mm

Additional to ref.-no.: (25922LPDP):

GVWR:	1,000kg
UVW:	620kg
Payload:	380kg

Subject to technical alterations

* BAST = Federal Highway Research Institute | ** TL-Warnleuchten = Technical Terms for Production and Delivery of Markers and Lamps | *** TL-Warnleuchten = Technical Terms for Production and Delivery of Markers