



Euro-Blitz / Euro-Blitz for vehicle charger box

- Electronic xenon flash light
- Bi-or Uni-directional
- High luminosity
- Small steady background light can be activated via flip switch
- Four fold-out feet
- Deep battery discharge and overcharge protection for rechargeable batteries
- Charging also from vehicles, 12v/24v
- Incl. adapter for plug-on to folding signs
- 60 flashes/minute
- Flash energy of 2 joule

• (E1)10R-023328 (Art-Nr. 20974A)

Customer details heat stamped and alternative colours for lenses and/or housings available on request.



Ref.-no. Packing Unit

Uni-/bi-directional:

20880 1
for 4 batteries

20881A 1
incl. dryfit accumulator, incl. charger 230v

360° omni-directional:

20884 1
for 4 batteries

20885A 1
incl. dryfit accumulator, incl. charger 230v

Uni-/bi-directional for vehicle charger box:

20974A 1
incl. dryfit accumulator for vehicle charger box

20975 1
vehicle charger box

	Battery version	Recharge. version
Power supply:	4 batteries 6v/9Ah	1 rech.batt. 6v/6.5Ah
Operation/h approx.:		
Day:	75	13
Night:	65	11
Weight:	1.6kg	3.3kg
Dimensions (LxWxH):	190x160x390 mm	



Tele-Blitz

- The height of the light can be elevated up to 95cm,
- Integrated handle
- Telescopic pole in red/white colour (cone looking)
- Electronic xenon flash light
- High luminosity
- Small steady background light can be activated via flip switch
- Four fold-out and pull-out feet
- Deep dis- and overcharge protection
- Charging also from vehicles, 12v/24v


On request the Tele-Blitz is available as sequential light system.

Ref.-no. Packing Unit

uni-directional:

20850 1
for 4 batteries

20851A 1
incl. dryfit accumulator 6v/6.5Ah
incl. charger

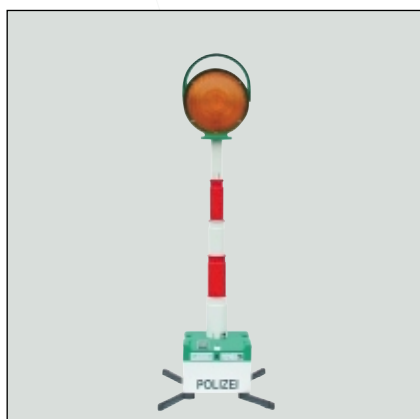


	Battery version	Recharge. version
Flash rate:	approx. 60/min.	
Flash energie:	2J	
Power supply:	4 batteries 6v/9Ah	1 rech.batt. 6v/6.5Ah
Operation/h approx.:		
Day:	60	11
Night:	110	19
Weight:	2.5kg	4.2kg
Dimensions (LxWxH):	215x155x450 mm	

Subject to technical alterations

* BAST = Federal Highway Research Institute | *** TL-Warnleuchten = Technical Terms for Production and Delivery of Markers and Lamps | ** TL-Baken = Technical Terms for Production and Delivery of Markers

Portable Electronic Xenon Flash Lamps

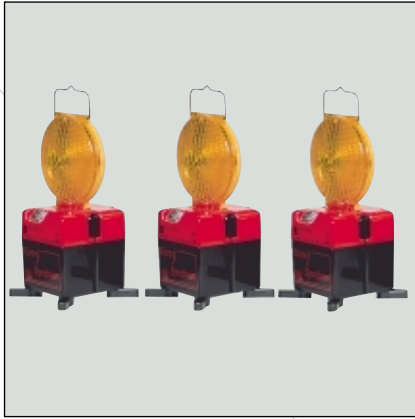

Euro-Synchron

- Sequential light system
- Uni-directional
- Identical lamps, to be placed at any position within a line of lamps
- Electronic xenon flash light
- High luminosity
- Small steady background light can be activated via flip switch
- Four fold-out feet
- Deep battery discharge and overcharge protection for rechargeable batteries
- Charging also from vehicles, 12v/24v
- Incl. adapter for plug-on to folding signs
- 60 flashes/minute
- Flash energy of 2 joule

Ref.-no.

Packing Unit

uni-directional:

208821 1
for 4 batteries

208831A 1
incl. dryfit accumulator, incl. charger 230v



	Battery version	Recharge. version
Flash rate:	approx. 69/min.	
Flash energy:	2J	
Power supply:	4 batteries 6v/9Ah	1 rech. batt. 6v/6.5Ah
Operation/h approx.:		
Day:	50	8
Night:	40	7
Weight:	1.6kg	3.3kg
Dimensions (LxWxH):	190x160x390 mm	



Recharge/storage unit

- Holds and charges up to 5 Euro-Synchron beacons
- Boxes for 3 and 4 beacons available
- Charging from 12v vehicles
- Box made of stainless steel

Ref.-no.


Packing Unit

211073 1
Box for 3 beacons, 12v

211074 1
Box for 4 beacons, 12v

211075 1
Box for 5 beacons, 12v

Dimensions (LxWxH): 740x180x190mm

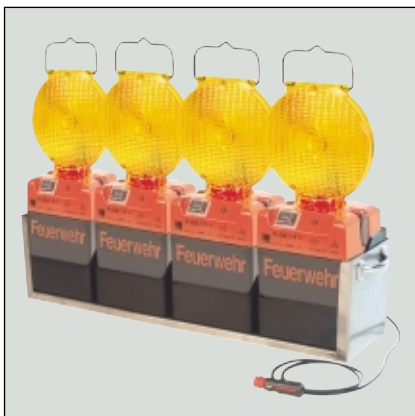

Subject to technical alterations

* BAST = Federal Highway Research Institute | *** TL-Warnleuchten = Technical Terms for Production and Delivery of Markers and Lamps | ** TL-Baken = Technical Terms for Production and Delivery of Markers